

SPECIAL FEATURES

With Double Flushing Ports.
 Suitable with Flanged, Pancake or Inline diaphragm Seals.
 Available in all Exotic Materials Grades.


STANDARD VERSION

Flange Size: 2" to 5" as per ANSI B 16.5
 Material: AISI 316 SS
 Number of Ports : Two
 Port Connection: 1/4" NPT (F) with male plug
 sealing face: Raised Face



APPLICATIONS

The Flushing Ring is designed to be sandwiched between the process flange & the Diaphragm Seal. Material collected in front Diaphragm can be flushed out through the flushing ports.

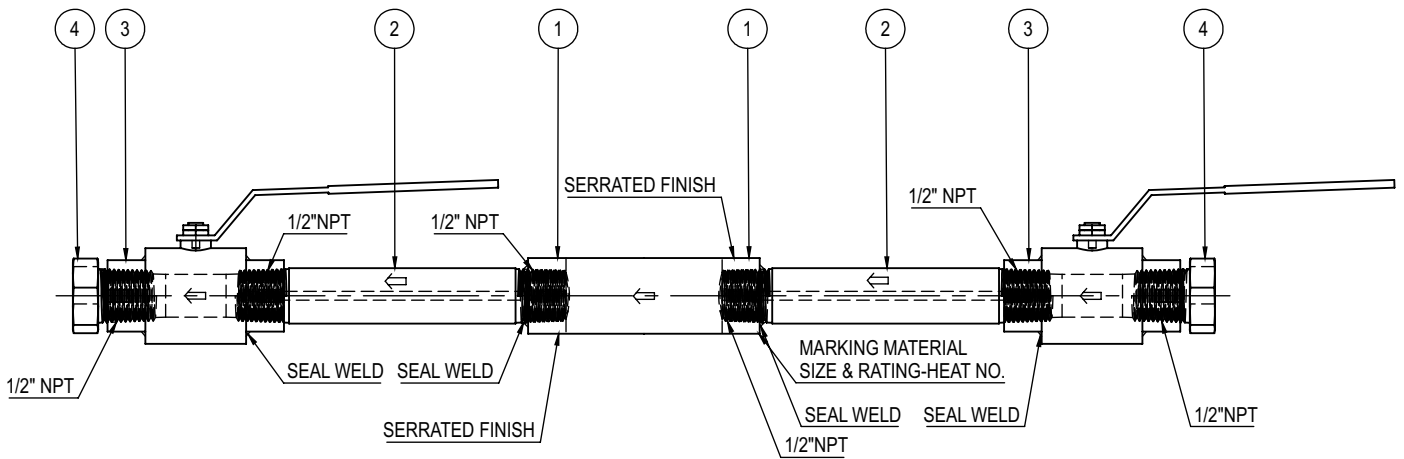

ITEM NO.	DESCRIPTION	QTY (NO.)
1	FLUSH RING	1
2	NIPPLE	2
3	BALL VALVE	2
4	BLIND PLUG	2

HOW TO ORDER

Example

BASIC MODEL

AC-04

FLUSHING RING MATERIAL

KM	AISI 316L SS	KV	CARBON STEEL	KX	TITANIUM	XX
KY	HASTELLOY C	KW	MONEL	CT	ANSI 316 SS (Standard)	
UW	INCONEL 625	UN	SUPER DUPLEX	TE	UNS S31254	

FLUSHING PORTS (WITH TWO MALE PLUGS)

VF	1/4"NPT (F) Standard	VD	1/2"NPT(F)	XX
-----------	----------------------	-----------	------------	----

SEALING FACE

A2	RAISED FACE	A3	FLAT FACE	A5	RING JOINT (RTJ,RJ)	XX
-----------	-------------	-----------	-----------	-----------	---------------------	----

Note : Other Sealing face can be provided on request.Please specify in notes.

OPTIONS

GH	Material Test Certificate**	XX
-----------	-----------------------------	----

Ordering Example: AC-04-XX-XX-XX-XX